


BAR LED M
11400

CIRCOLO LED M
11403

SABER LED L
11381



CIRCOLO LED M
11402

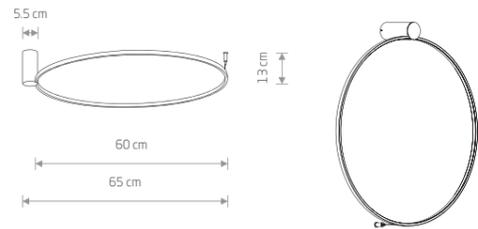

CIRCOLO LED M

■ painted aluminum, plastic PC

■ 11402 3000K □ 11603 3000K




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11402	21W LED	3000K	660 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11603	21W LED	3000K	660 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

■ SILK OLIVE P031 □ WHITE P004 RAL 9003



CIRCOLO LED
11398

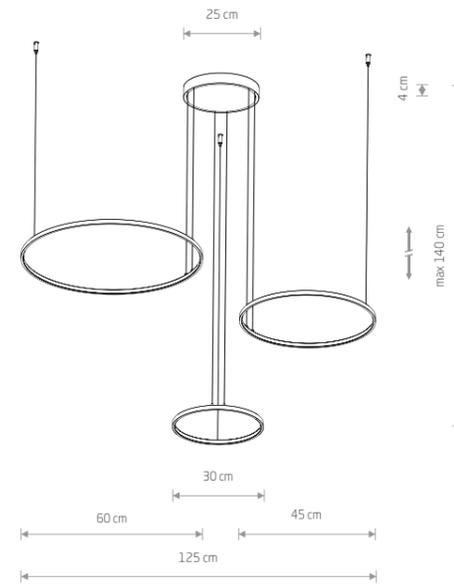

CIRCOLO LED

■ painted aluminum, painted steel, plastic PC

■ 11398 3000K □ 11602 3000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11398	45W LED	3000K	1600 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11602	45W LED	3000K	1600 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

□ WHITE P004 RAL 9003 ■ SILK OLIVE P031